





S27

27" Ultra-Slim Kiosk

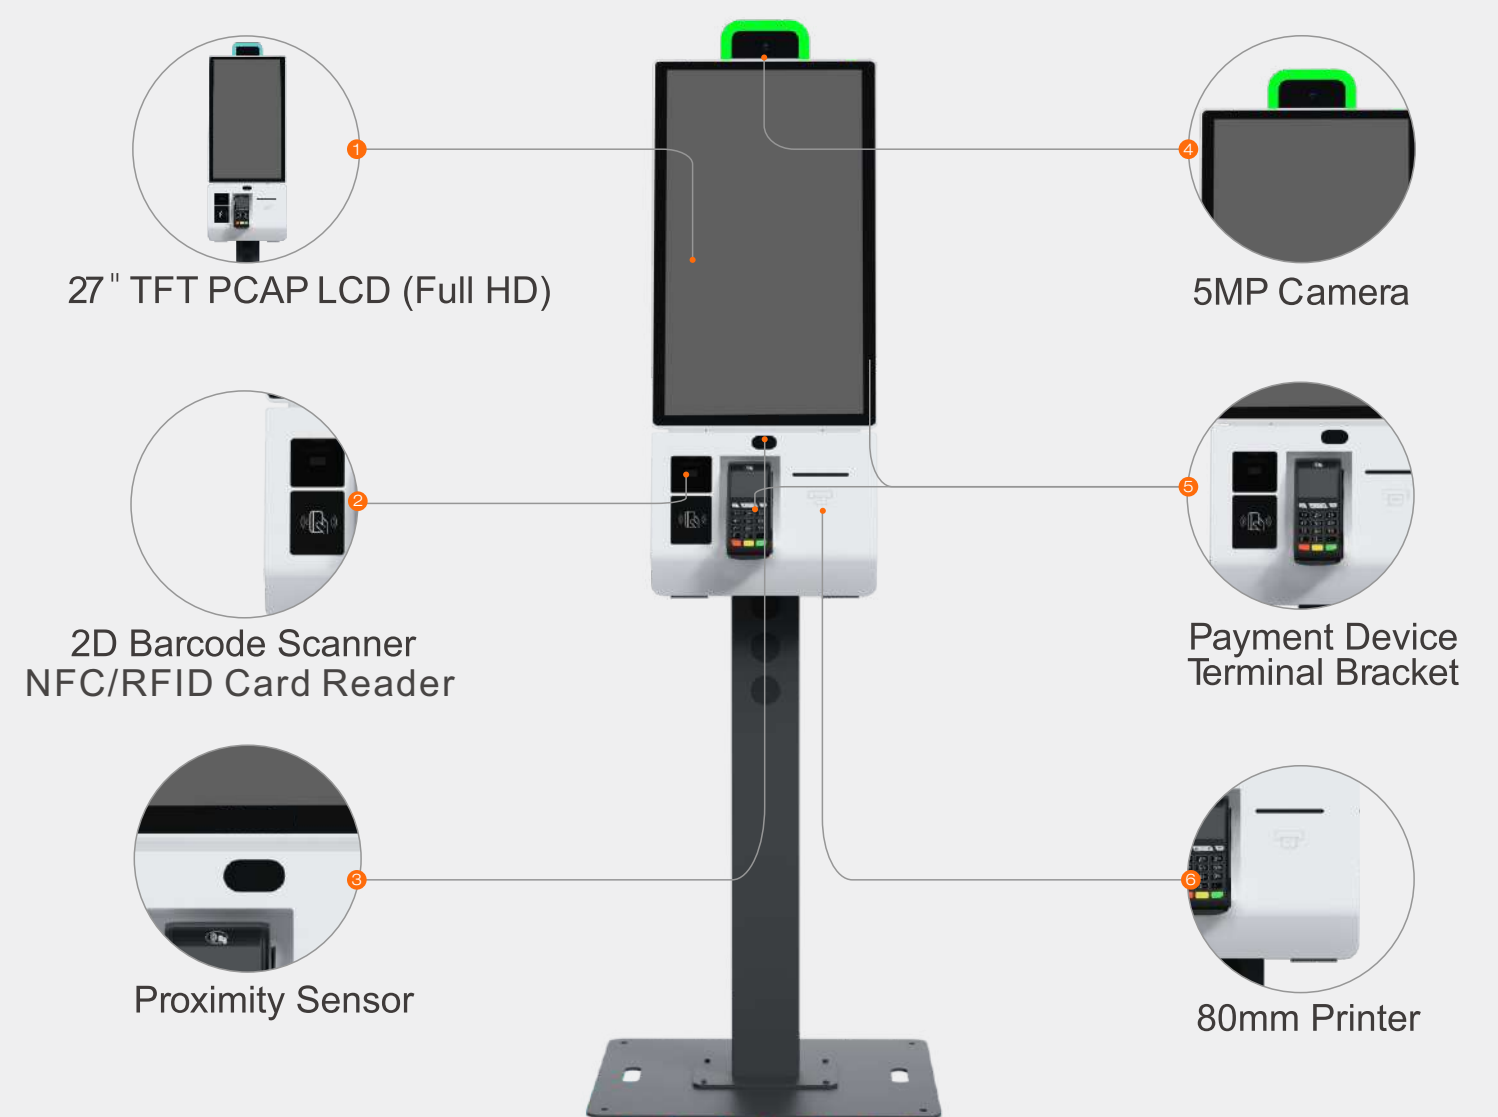

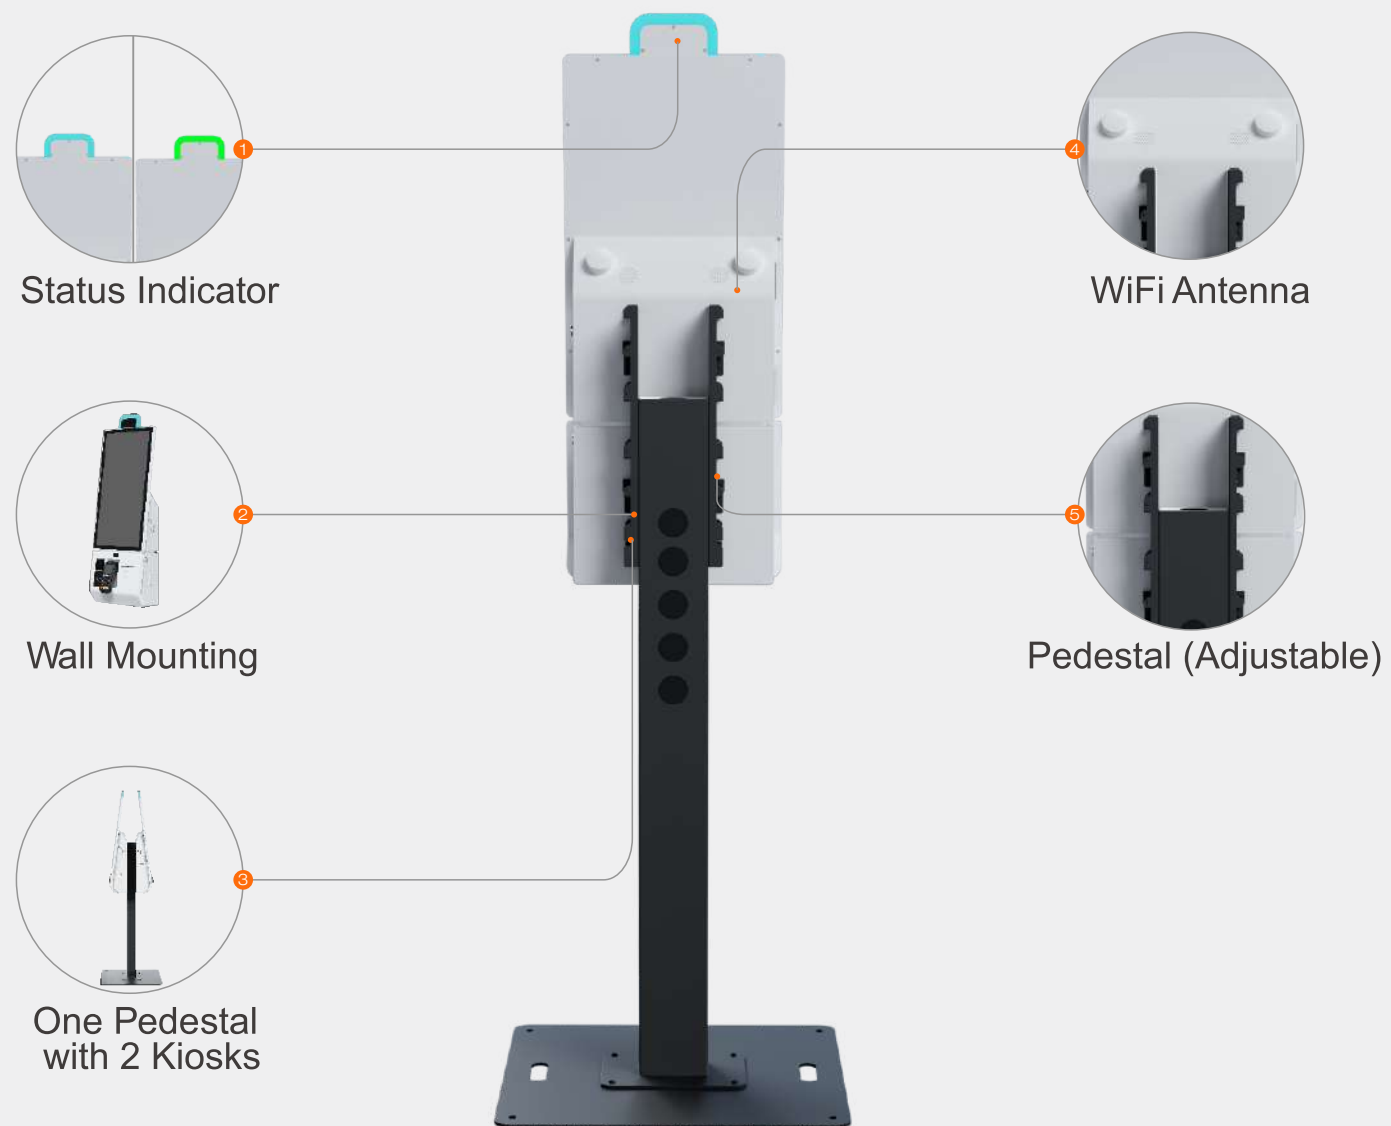





S27

27" Ultra-Slim Kiosk

Features

- Stylish, Modern Design with an 82.5° tilt for intuitive interaction
- Anti-Scratch Coating for Rugged Durability and Long-Lasting Protection
- 27" Full HD Display with Capacitive Multi Touch
- Sturdy Pedestal can support Dual Kiosks (with 3 levels Adjustable Height)
- Space-Saving Wall-Mount: 40mm from Wall to System
- Optional Modular Design for future Expansion and Customization
- High Speed Printer support Customization
- Built-in 5W Powerful speaker with AI Support Microphone
- AI Security Camera
- Triple-status LED Indicator for real-time status monitoring
- Efficient cooling system with splash-proof and dust-filtered vents
- Clean and Tidy cable management
- Unified Device and Service Management powered by ITSM Intelligence

S27 Specification

Model Number		S 27		
Processor		Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz	Intel® Core™ i3-1215U Processor 10M Cache, up to 4.40 GH Intel® Core™ i5-1235U Processor 12M Cache, up to 4.40 GHz	Rockchip 3576, Transformer Architecture, Octa-core Processor, 6 TOPS Computing Power, up to 2.2GHz
System Memory		1 x DDR4, SO-DIMM, 8GB (Max. 32GB)		DDR4, 8G(Onboard)
SSD		1 x M.2 NVMe 128GB SSD (256G/512G optional)	1 x M.2 SSD 128GB, NVMe/SATA Adaptive (256G/512G optional)	eMMC 64G
LCD	Size	27" TFT LCD Panel		
	Brightness	400-500 cd/m²		
	Resolution	1920 x 1080		
Touch Screen		True-Flat Projected Capacitive Touch		
External I/O Port	USB	3 x USB3.0 + 7 x USB2.0	4 x USB3.0 + 6 x USB2.0	1 x USB3.0 + 7 x USB2.0 + 1 x Type-C
	Serial Port	2 x RJ50 + 1 x DB9		2 x RJ50
	DC-In	1 x DC-In		
	VGA	N/A		
	HDMI	2 x HDMI	1 x HDMI	N/A
	LAN	1 x LAN (10/100/1000Mb)	2 x LAN (10/100/1000Mb)	1 x LAN (10/100/1000Mb)
	TF	N/A	N/A	N/A
	SIM-Slot	N/A	N/A	1 x SIM-Slot
	OTG Upgrade Button	N/A		1 x U-Boot
	Audio	1 x Audio (3.5mm Earphone Connector, Support Line-Out&Line-In)		
	LVDS Signal	1 x LVDS Signal (30-pin)		
	LVDS Backlight	1 x LVDS Backlight (6-pin)		
	Power Switch	1 x Power Switch		
Power		1 x 12V-5A/60W (System) + 1 x 24V-2A/48W (Printer)	1 x 12V-7A/84W (System) + 1 x 24V-2A/48W (Printer)	1 x 12V-5A/60W (system) + 1 x 24V-2A/48W(Printer)
WIFI&BT		mPCI-E WiFi2.4-5G/BT4.2		WiFi2.4-5G/BT5.0 On Board
OS Support		Windows 11 IoT, Windows10 IoT LTSC, Ubuntu		Android 14.0
Certification		CE, FCC, UKCA, RoHS		
Environment	Operating Condition	0°C - 40°C, 20% - 85% RH Non Condensing		
	Storage Condition	-15°C - 70°C, 20% - 85% RH Non Condensing		
Dimension/Weight (N.W.)	Floor Standing	602mm x 602mm x 1860mm, 54.5 Kg		
	Wall-Mounted	380mm x 166mm x 985mm, 27Kg		
Standard	Printer	3" Thermal Printer, Auto Cutter, SNBC-S80 250mm/sec		
Optional	Speaker	2 x 5W Speaker		
	Scanner	WS71 (USB, 1D, 2D, Reading Precision: ≈4mil, Scan Speed: 200cm/s, Resolution 640*480, Depth of field 10-130mm))		
	MSR	USB (VCOM Optional), 1/2/3 Track, ISO7810, 7811-1/2/3/4/5, IBM, AAMVA, JIS-2 Standard		
	NFC/RFID Reader	Support ISO/IEC 14443-A&B (MIFARE), JIS x 6319-4 (Felica), NFC Protocols - Tag Read/Write (ISO/IEC-18092)		
	Audio Navigation Keyboard (ADA/EAA/BFSG)	Integrated 3.5mm Audio Jack (6 Keys /18 Keys Optional)		
	Payment Device Bracket	Custom Bracket Support for various EMV Payment Devices		
	Status Indicator	Status Indicator For MB and Printer (Red Light Indicate an Error, Blue or Green Light Indicate in Service)		
	Proximity Sensor	60~80cm Proximity Sensor		
	Pedestal	Base Plate, Column in Metal		
	Camera	5MP Camera, USB Connection AI Security Camera		
	Microphone	Microphone Supports AI Input		
	Bagging Area	Durable Bagging Area for items sorting and checkout		
	Security Scale	Security Scale		
	Wall Mount Bracket	40mm from wall to System		

